



GERARD DANIEL WORLDWIDE


GERARD DANIEL WORLDWIDE ~ 34 BARNHART DRIVE ~ HANOVER, PA 17331
PHONE: 1800-323-3332 ~ FAX: 717-637-5901



Galvanized Hex Netting

DATA SHEET

Gerard Daniel Worldwide's Hex Netting is manufactured with stainless steel and galvanized alloys. Insulators use Hex Netting (Chicken Wire) as a medium to hold mastics and cements in place.

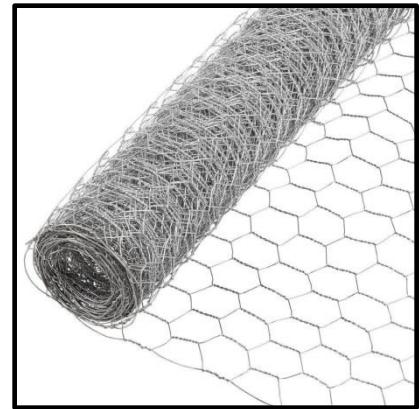

MATERIAL PROPERTY DATA

| | |
|--------------------|--------------------------|
| WIRE SPECIFICATION | ASTM – A510 CARBON STEEL |
| MESH | 1" HEX OPENINGS |
| WIRE DIAM | .034"-.035" |
| WIDTH | 24", 36" & 48" |
| LENGTH | 150 FEET |
| ZINC COATING | 0.080 OZ/FT2 |

| | |
|------------|-----------|
| CHEMISTRY | |
| CARBON | 0.08-0.13 |
| MANGANESE | 0.30-0.60 |
| SILICON | <=0.03 |
| PHOSPHORUS | <=0.035 |
| SULFUR | <0.035 |

| | |
|------------------|---------------------|
| TENSILE STRENGTH | 50,000 - 75,000 PSI |
|------------------|---------------------|